

All loading and design criteria supplied by customer is assumed accurate. Only the stated Design Assumptions were considered, and must be verified by the responsible Engineer of Record (EOR). The basis of Hilti component and connection design is the published data in the current Hilti Technical Guide, including material and cross-section properties, allowable load values, factors of safety, methods of calculation, and limiting factors. The EOR must verify suitability for any specific application, and the capacity of the supportive structure to receive the shown configuration and associated reaction loads. Modification to components and/or design may alter performance and must be evaluated by the EOR.

TYPICAL DETAIL TYPE:
CABLE TRAY SUPPORT

TYPICAL DETAIL DESCRIPTION:
BRACED F - SHAPE - 3 TIER

DESIGNED BY: KL
REVIEWED BY: AJV


DRAWN BY: GAB
ISSUE DATE: 15 DEC 14

REVISIONS:

NO.	DESCRIPTION:	DATE:
A	ORIGINAL ISSUE	15 DEC 14


TYPICAL DETAIL NOMENCLATURE:
CT-BF02-C

DRAWING NUMBER: 01
SHEET: 1/1

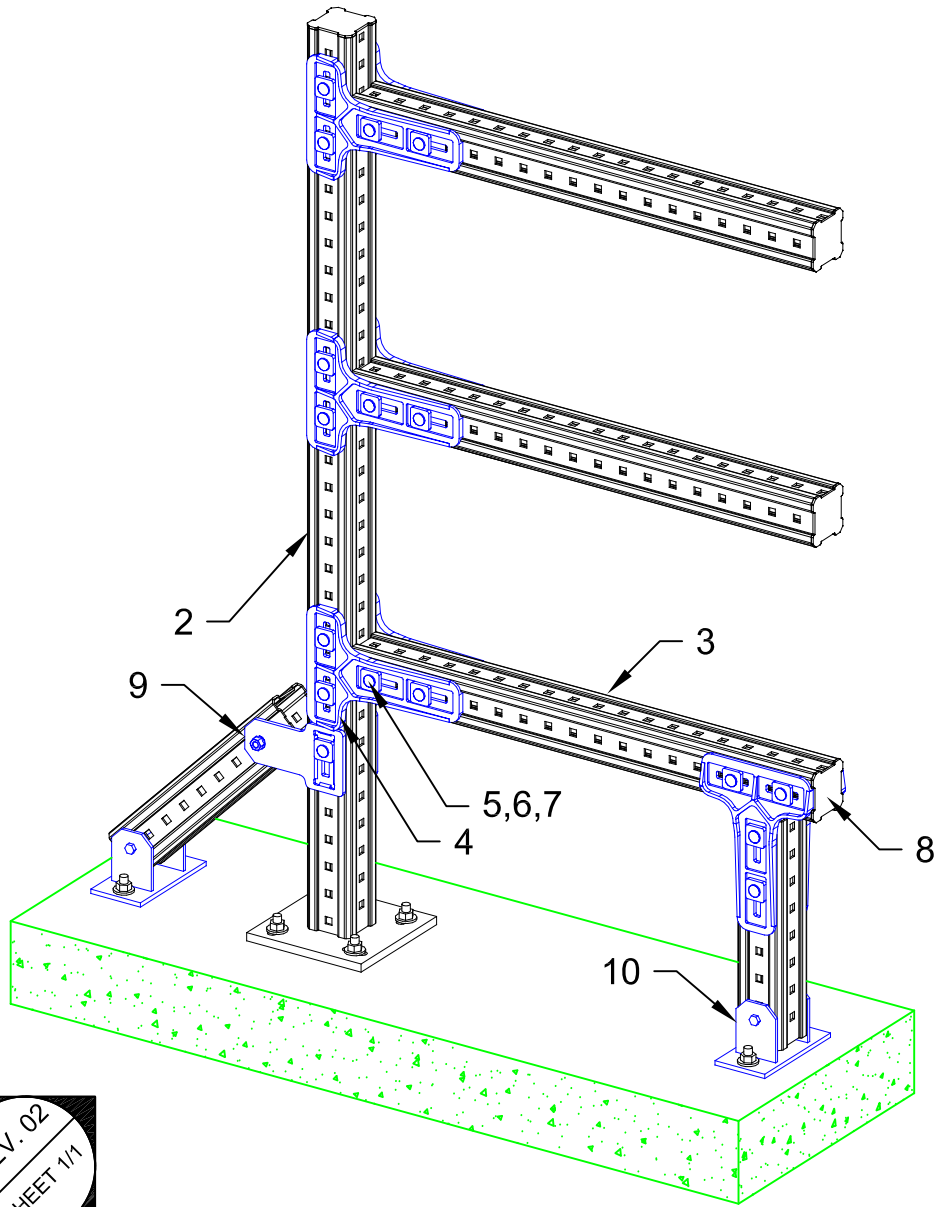

ELEV. 02
SHEET 1/1

01 ISOMETRIC
N.T.S.

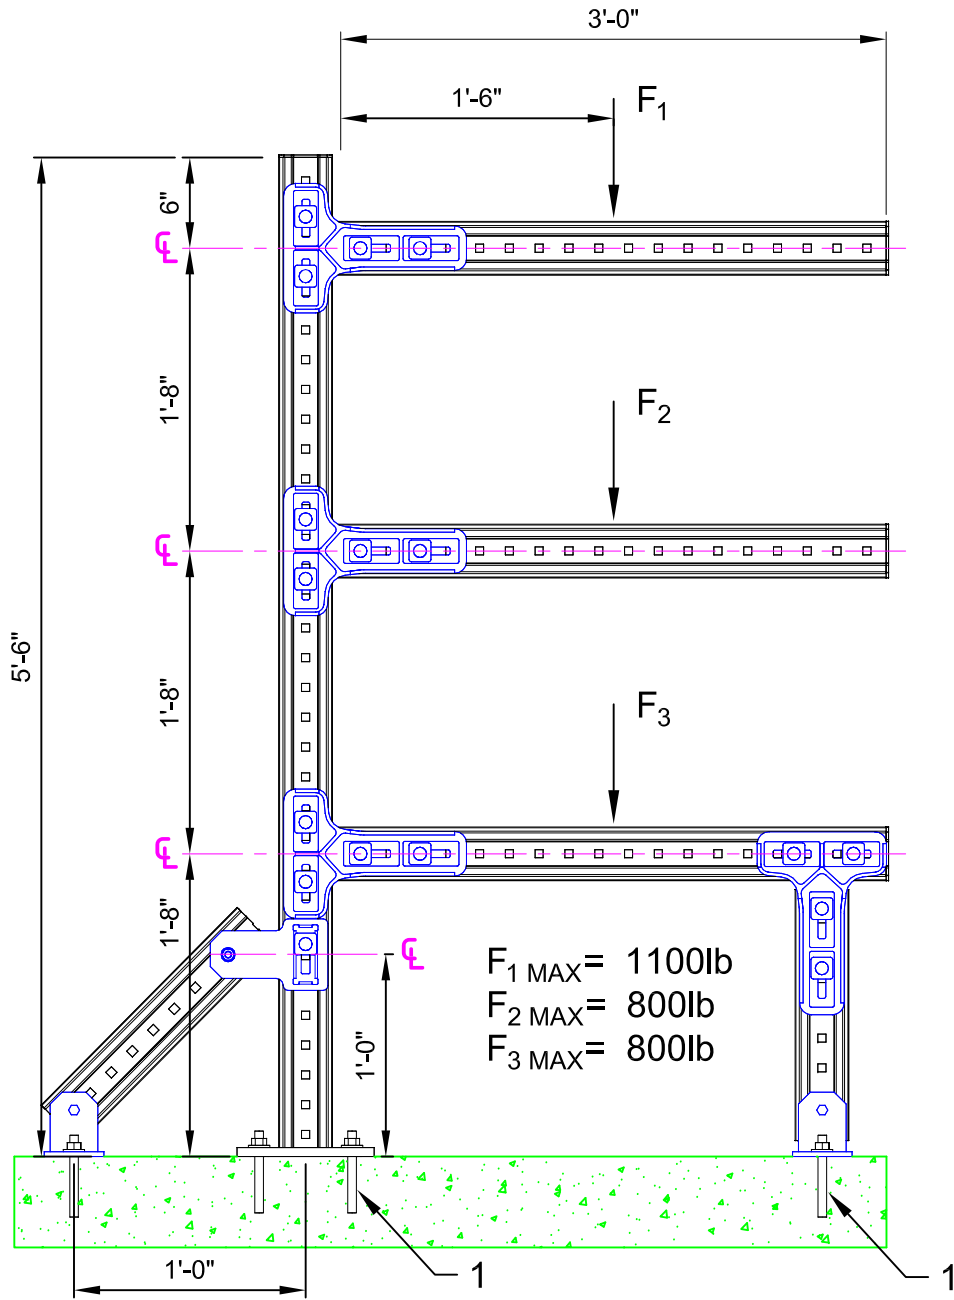

02 ELEVATION
N.T.S.

No.	Unit Qty	Unit	Description	Box Qty	# Boxes Needed	Item No.
1	8	EA	USE KB3 OR KB-TZ AS APPROPRIATE	VARIES	VARIES	VARIES
2	1	EA	CONNECTOR MIC-C90-D-2000 WELDED BRACKET	1	1	267793
3	AS REQ'D	EA	GIRDER MI-90 3M	1	AS REQ'D	304798
4	4	PR	CONNECTOR MIC-90-LH (2048107)	3	2	SPECIAL
5	16	EA	EASYHAND SCREW MIA-EH90	10	2	304887
6	16	EA	TOOTHED PLATE MIA-TP	20	1	305707
7	16	EA	MI HEX NUT M12-F-SL-WS 3/4"	100	1	382897
8	4	EA	GIRDER END CAP MIA-EC90	25	1	432077
9	1	PR	CONNECTOR MIC-U-MA	2	1	304806
10	2	EA	CONNECTOR MIC-CU-MA CONCRETE	4	1	304828

- NOTE(S):
- PRELIMINARY NOT FOR CONSTRUCTION
 - DESIGN LOADS
DL: AS SHOWN ON SUPPORT
LOADS ARE ULTIMATES.
 - NO LATERAL LOADS CONSIDERED.
 - REFER TO COMPONENT MANUFACTURER'S IFUs FOR
REQUIRED INSTALLATION INFO.
 - MAX. SUPPORT SPACING: TBD.
 - CABLE TRAY ATTACHMENT BY OTHERS.