

HILTI

TECHNICAL MANUAL SCREW FASTENING INTERIOR FINISHING



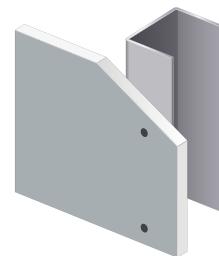
TABLE OF CONTENTS

1.	Overview	4
• Drywall boards to metal substructure	4	
• Drywall boards to wood substructure	4	
• Fibre boards to wood or metal substructure	5	
• Hard boards to wood or metal substructure	5	
• Cement boards to wood or metal substructure	5	
• Drywall boards to drywall boards	6	
• Acoustic boards to metal substructure	6	
• Wood boards to metal substructure	6	
• Wood boards to wood substructure	7	
• Metal framing	8	
• Wire lath to metal substructure	9	
• Door framing	9	
2.	Features of interior finishing screws	10
• Head shapes	10	
• Screw drive / Recess type	11	
• Types of threads	12	
• Types of screw points	13	
• Hilti drywall screw nomenclature	14	
3.	Corrosion Protection	16
4.	Screw Pages	20
5.	Overview of tools and accessories	67

1. OVERVIEW

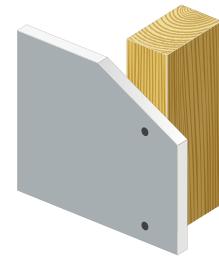
Drywall boards to metal substructure

Description	Screw	Page
S-DS 01 B		22
S-DS 01 Z		24
S-DS 02 Z		28
S-DD 01 B		26
S-DD 01 Z		27
S-DD 06 C		36
S-DD 10 Z		39
S-DD 10 C		40



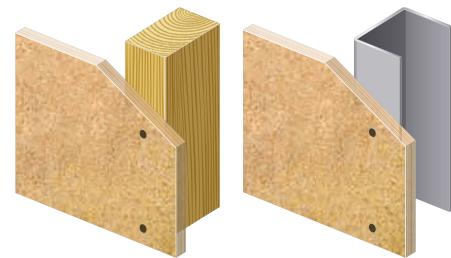
Drywall boards to wood substructure

Description	Screw	Page
S-DS 02 Z		28
S-DS 03 B		29
S-DS 03 Z		30
S-DS 03 S		31
S-DD 10 Z		39
S-DD 10 C		40

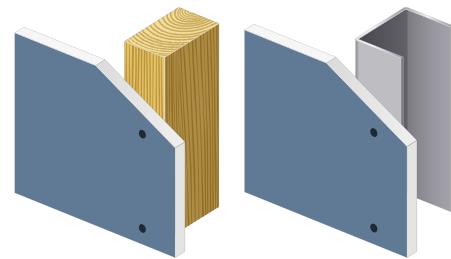


Fibre boards to wood or metal substructure

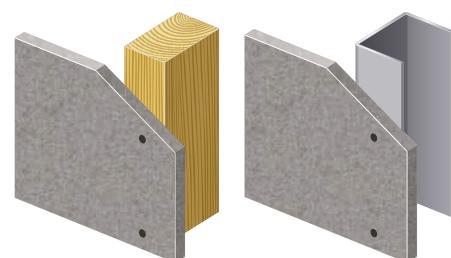
Description	Screw	Page
S-DS 10 Z		38
S-DS 14 B		41
S-DS 14 Z		42
S-DS 02 Z		28
S-DD 10 Z		39
S-DD 10 C		40

**Hard boards to wood or metal substructure**

Description	Screw	Page
S-DD 01 B		26
S-DD 01 Z		27
S-DD 10 C		40
S-DS 20 B (except Habito)		44
S-DS 22 B (all hard board types)		45

**Cement boards to wood or metal substructure**

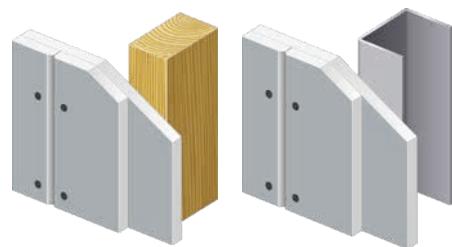
Description	Screw	Page
S-DD 10 C		40
S-WD 11 Z		64



OVERVIEW


Drywall boards to drywall boards

Description	Screw	Page
S-DS 04 B		32



Acoustic boards to metal substructure

Description	Screw	Page
S-DS 16 B		43




Exterior sheathing boards to metal substructure

Description	Screw	Page
S-DD 01 CRC		65



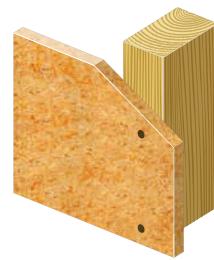
Wood boards to metal substructure

Description	Screw	Page
S-DD 10 C		40
S-WD 11 Z		64
S-WS 12 Z		58
S-WS 13 Z		59
S-WS 13 B		60



Wood boards to wood substructure

Description	Screw	Page
S-DD 10 C		40
S-WS 03 Z		52
S-WS 04 B		53
S-WS 08 Z		54
S-WS 08 C		55
S-WS 08 S		56
S-WS 11 Z		57
S-WS 12 Z		58
S-WS 13 Z		59
S-WS 13 B		60
S-WS 16 S		61
S-WS 22 C		62
S-WS 55 Z		63



OVERVIEW

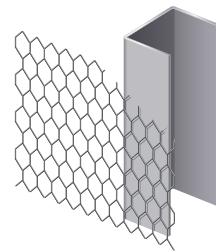
Metal framing

Description	Screw	Page
Self-drilling screws		
S-DD 02 Z		46
S-DD 03 Z		47
S-DD 03 Z LH		48
S-DD 06 C		36
S-DD 07 Z		49
S-DD 08 Z		50
Stitch point screws		
S-DS 05 B		33
S-DS 06 Z		34
S-DS 06 C		35
S-DS 07 Z		37

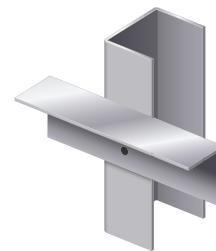


Wire lath to metal substructure

Description	Screw	Page
S-DD 03 Z		47
S-DD 03 Z LH		48
S-DD 06 C		36
S-DS 06 C		35

**Door framing**

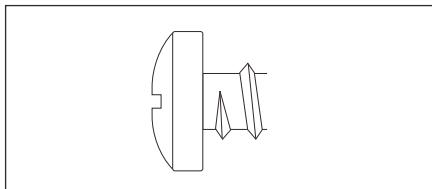
Description	Screw	Page
S-MD 03 PZ		51



2. FEATURES OF INTERIOR FINISHING SCREWS

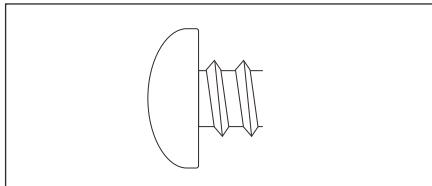
Head shapes

The oval head has a large bearing surface so that higher pull-over values can be obtained.



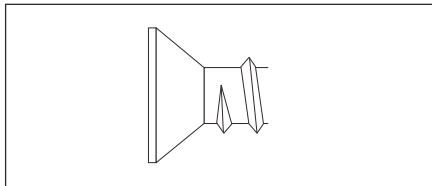
Oval head

The diameter of a pan head is somewhat smaller than that of an oval head. The pan head is used primarily for fastening metal to metal.



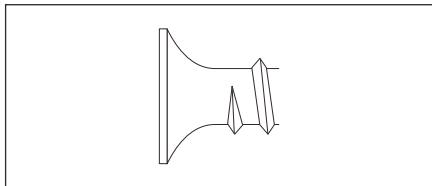
Pan head

The countersunk head is for fastenings where the screw head may not protrude above the surface.



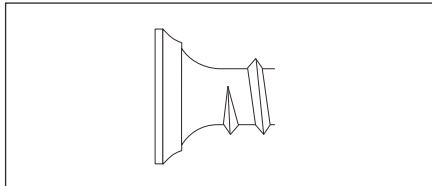
Countersunk head

The bugle head is used when fastening drywall panels (plasterboard, gypsum panels, etc.) to metal or timber framing.



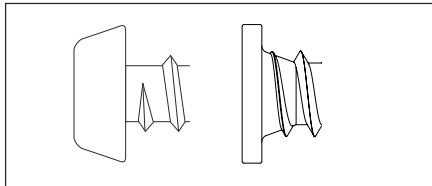
Bugle head

This is a special form of bugle head for fastening hard drywall panels (plasterboard, gypsum panels, etc.).



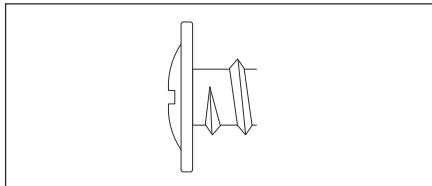
Double-countersunk head

This head is used for metal-to-metal fastenings, such as drywall tracks, metal framing members, etc.



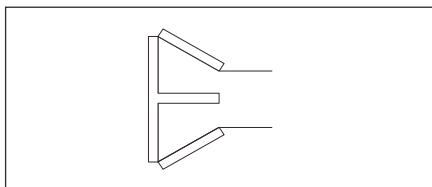
Framing head
Flat head

The wafer head is used to fasten light-weight panels to metal framing members. The large bearing surface and the large diameter of the screw head help to ensure that the required pull-over values are obtained.



Wafer head

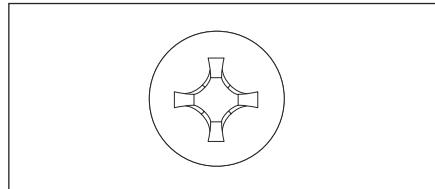
This head is for fastenings in timber and fiberboard panels. The screw head sinks itself into the material being fastened and also helps to prevent the screw from working loose.



Ribbed-countersunk head

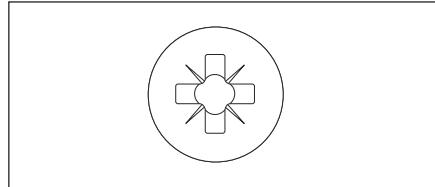
Screw drive / Recess type

Standard drive recesses for most drywall screws



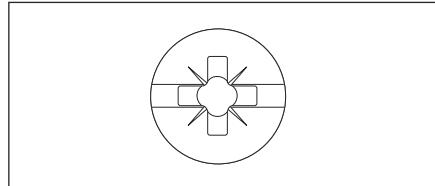
**Phillips cross recess
(PH)**

Head drive recess for wood screws



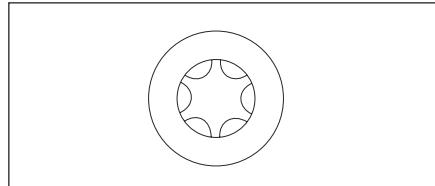
**Pozidrive cross recess
(PZ)**

Pozidrive cross recess with an additional slot for a screwdriver; a head drive recess for wood screws



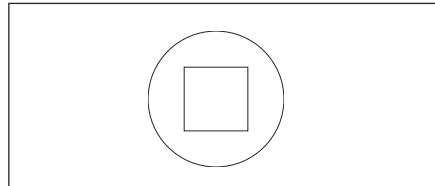
**Combination of Pozidrive
and cross recess**

Head drive recess for tapping screws
and wood screws



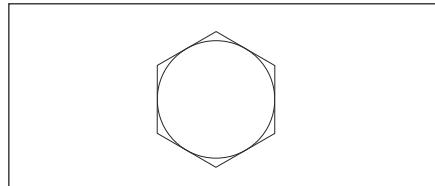
**Torx
(TX)**

Square head for wood screws in HNA



**Square
(SQ)**

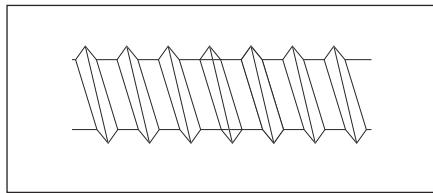
Hexagon head for wood screws



**Hexagon head
(HEX)**

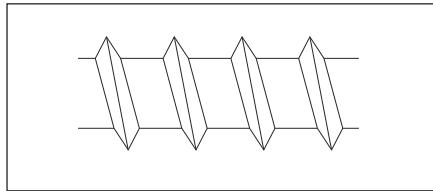
Types of threads

The most widely used thread shape for fastening drywall panels to metal framing metal substructure. This kind of thread enables high pull-out values to be obtained in thin metal. (Specified according to DIN 18 182, part 2)



fine thread
(single or double lead)

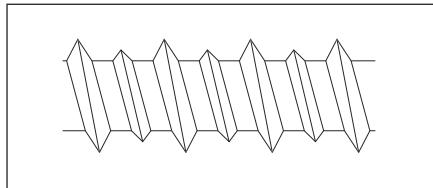
This kind of thread is used primarily for fastenings in timber (wood). Consequently, it has a taper point. This combination makes it possible for a low screw driving torque to be used and a good pull-out value to be obtained in timber (wood). (Specified according to DIN 7998)



Coarse thread

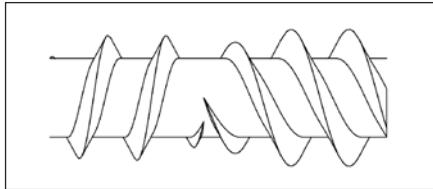
The HI-LO thread is suitable for avoiding problems, such as thread stripping when fastening in plastics. Further advantages are:

- High pull-out values
- Little tendency to cause splitting
- Optimal screw driving times
- High over-tightening torque



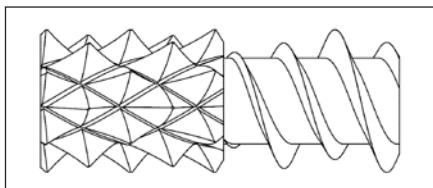
HI-LO thread
(double-lead thread with high and low turns)

This kind of thread is used primarily for fastening hardboards and fibreboards. The counterthread eliminates creation of gypsum bumps on the board's surface.



Counterthread

It removes excessive gypsum in order to eliminate bumps on the board's surface when the screw penetrates the board.

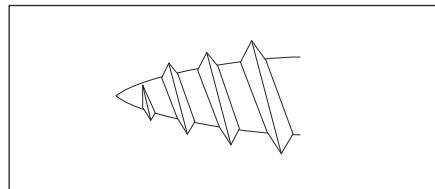


Pineapple with HI-LO thread

Types of screw points

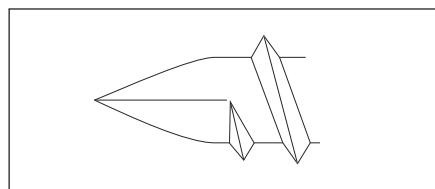
The S point or tapered point is used primarily when fastening in plastic, wood or lightgauge metal framing members up to max. 0.8 mm thickness.

Main field of application: Drywall fastening



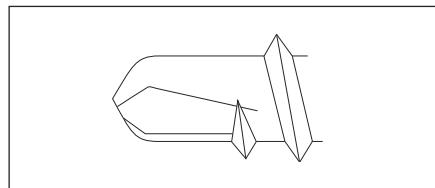
**S point
(stitch)**

This is a special point for wood-to-wood fastenings. The nail point makes it easier for the screw to be positioned with pinpoint accuracy. Also, it breaks wood fibers during penetration and thus hardly splits wood battens, laths, etc.



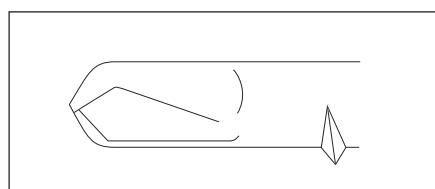
Nail point

The drill point drills the screw's own root (minor) diameter. Afterwards, the screw taps its own thread in the framing steel. In view of these features, this point is used primarily for steel thicker than 1 mm.



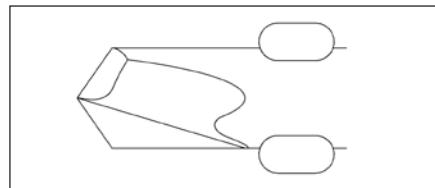
Drill point

This is a special point for screws for window installation. Its extended drill point ensures that thread tapping does not begin until the root hole (minor) diameter has been drilled in multi-layer frames / sections.



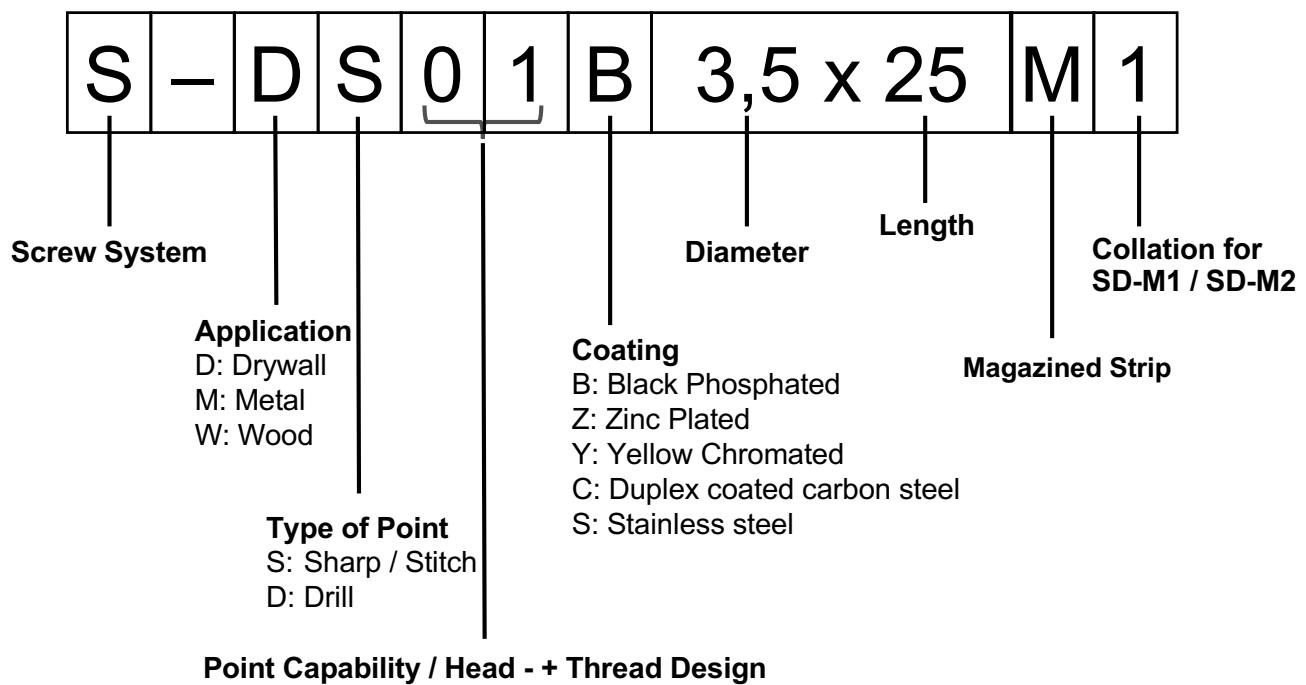
Pilot point

Wing tips on a screw enlarge the diameter of the hole in the board. The wings snap off when the screw comes up against a steel substructure.



Wing tip

HILTI DRYWALL SCREW NOMENCLATURE



3. CORROSION PROTECTION

With the objective to supply reliable and durable products, Hilti is constantly active in the development of methods of corrosion protection suitable for use with screws and fastening systems.

To evaluate the risk of corrosion, it is essential to assess the interaction between environmental conditions, material properties, material combinations and design characteristics.

To understand this interaction, you would need to consider the following influencing factors to atmospheric corrosion:

- **Humidity:** Humidity is a requirement for all atmospheric corrosion reactions.
- **Temperature:** The higher the temperature, the higher the rate of corrosive attack.
- **Salt:** Salt-laden air near the sea coast and the salt used for de-icing in winter accelerate corrosion.
- **Industrial pollution:** The high content of Sulphur dioxide accelerates corrosive reactions.
- **Galvanic (contact) corrosion:** This form of corrosion is caused by the contact of dissimilar metals (where one metal is less noble than the other).

Corrosion protection systems used by Hilti for screws

Hilti currently offers three different corrosion protection solutions that are adapted according to how the products are to be used and the applicable ambient conditions:

Phosphating and oiling gives screws a black appearance and it is not considered as a corrosion protection coating.

Galvanic zinc plated carbon steel

The thickness of the zinc layer is between 4 and 15 µm, depending on the type of screw. The steel is protected from corrosion by sacrificial corrosion of the zinc, which is a base metal (i.e. not a noble metal). The zinc layer dissolves during the course of this protective procedure. The period of time until the steel begins to rust is thus defined by the rate at which the zinc corrodes.

Duplex-coated carbon steel

A duplex coating system is a corrosion protection system consisting of galvanizing (see above) in combination with other coatings. The galvanizing and the additional coating work together as a protective system. The coating protects the zinc layer from the effects of the atmosphere and chemical influences, thereby reducing the rate of corrosion. This increases the life of the screw, making its use possible in more corrosive atmospheres than a simple electroplated zinc screw.

A2 grade stainless steel

A2 stainless steel is an austenitic, acid-resistant CR-Ni steel with a low carbon content. Its high chromium content leads to formation of an oxide layer which provides a high level of corrosion protection. In situations where the oxide layer is destroyed it usually reforms if oxygen and moisture are present.

TEST PROCEDURES OF CORROSION PROTECTION

Salt spray test (DIN EN ISO 9227)

The salt spray test checks the effectiveness of protection against corrosion and quickly identifies defects, flaws, etc. in metal platings. Screws are placed in a test chamber with a temperature of about 35°C in which they are sprayed constantly with a salt solution (usually sodium chloride).

The test chamber has a volume of at least 400 liters and the walls are lined with a corrosion-resistant material to ensure that the test results are not influenced by other factors.

The duration of the test depends on the type and thickness of the coating on the screw and the coating's corrosion resistance, and may vary between 6 hours and more than 1000 hours.

Hilti requirements are tested according to DIN EN ISO 9227. Hilti screws in Europe and RoW have the following life expectancies results (in hours).

• B – Galvanized (phosphated)	≥ 24 hours
• Z – Zinc chromated (galvanized carbon steel)	≥ 48 hours
• Y – Yellow chromated	≥ 48 hours
• C – Duplex coated carbon steel	≥ 1 000 hours
• S – A2 grade stainless steel	≥ 1 440 hours

ENVIRONMENT CATEGORIES

Applications can be classified in various environment categories, taking the following main factors into account:

Indoor applications



- Dry indoor environments**
(heated or air-conditioned areas) without condensation, e.g. office buildings, schools



- Indoor environments with temporary condensation**
(unheated areas without pollutants), e.g. storage sheds

Outdoor applications



- Outdoor, rural or urban environment with low pollution**
Large distance (> 10 km) from the sea



- Outdoor, rural or urban environment with moderate concentration of pollutants**
and/or salt from sea water. Distance from the sea 1-10 km



- Coastal areas**
Distance from the sea < 1 km



- Outdoor, areas with heavy industrial pollution**
Close to plants < 1km (e.g. petrochemical, coal industry)



- Close proximity to roadways** treated with de-icing salts,
Distance from roadways < 10 m

Special applications



- Special applications**
Areas with special corrosive conditions, e.g. road tunnels with de-icing salt,
indoor swimming pools, special applications in the chemical industry
(exceptions possible).



Important notes

The ultimate decision on the required corrosion protection must be made by the customer. Hilti accepts no responsibility regarding the suitability of a product for a specific application, even if informed of the application conditions.

The tables are based on an average service life for typical applications. For metallic coatings, e.g. zinc layer systems, the end of lifetime is the point at which red rust is visible over a large fraction of the product and widespread structural deterioration can occur – the initial onset of rust may occur sooner. National or international codes, standards or regulations, customer and/or industry specific guidelines must be independently considered and evaluated.

These guidelines apply to atmospheric corrosion only. Special types of corrosion, such as crevice corrosion or hydrogen assisted cracking must be independently evaluated.

The tables published in this brochure describe only a general guideline for commonly accepted applications in typical atmospheric environments. Suitability for a specific application can be significantly affected by localized conditions, including but not limited to:

- Elevated temperatures and humidity
- High levels of airborne pollutants
- Direct contact with corrosive products, such as found in some types of chemically-treated wood, waste water, concrete additives, cleaning agents, etc.
- Direct contact to fresh / young concrete (less than 28 days old)
- Electrical current
- Contact with dissimilar metals
- Confined areas, e.g. crevices
- Physical damage or wear
- Extreme corrosion due to combined effects of different influencing factors
- Enrichment of pollutants on the product

ENVIRONMENT CATEGORIES

The following tables provides a general guideline for the most common screw fastening applications. The appropriate corrosion protection for each fastening material is shown based on the typical atmospheric environments (see notes).

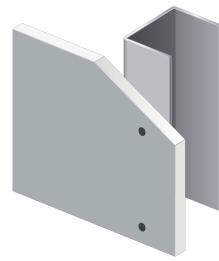
Screws	S-DS B S-DD B	S-DS Z S-DD Z S-DS Y S-DD Y	S-DS C S-DD C S-WS C	S-DS S S-WS S
Coating/Material	Phosphated carbon steel	Galvanic zinc plated carbon steel	Duplex-coated carbon steel	A2 stainless steel
Environmental conditions	Fastened part			
 Dry indoor	Steel (zinc-coated, painted), aluminium, stainless steel	■	■	■
 Indoor with temporary condensation	Steel (zinc-coated, painted), aluminium, stainless steel	—	—	■
 Outdoor with low pollution	Steel (zinc-coated, painted), aluminium, stainless steel	—	—	□ ²⁾ —
 Outdoor with moderate concentration of pollutants	Steel (zinc-coated, painted), aluminium, stainless steel	—	—	□ ²⁾ —
 Coastal areas	Steel (zinc-coated, painted), aluminium, stainless steel	—	—	—
 Outdoor, areas with heavy industrial pollution	Steel (zinc-coated, painted), aluminium, stainless steel	—	—	—
 Close proximity to roads	Steel (zinc-coated, painted), aluminium, stainless steel	—	—	—
 Special applications	Steel (zinc-coated, painted), aluminium, stainless steel	—	—	—

- = expected lifetime of fasteners made from this material is typically satisfactory in the specified environment based on the typically expected lifetime of a building. The assumed service life in ETA approvals for screw fasteners is 25 years.
- ²⁾ = a decrease in the expected lifetime of non-stainless fasteners in these atmospheres must be taken into account (≤ 25 years). Higher expected lifetime needs a specific assessment.
- = fasteners made from this material are not suitable in the specified environment. Exceptions need a specific assessment

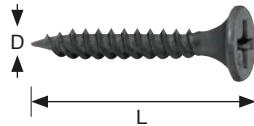
4. SCREW PAGES



S-DS 01 B

Application:Drywall boards to metal substructure ≤ 0.88 mm**Technical data:**

Screw design	Stitch point - Fine thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Phosphated
Penetration depth	Min. 10mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 01 B 3,5x25	25	3.5	0.60 - 0.88	≥ 2.8	1000	2007245
S-DS 01 B 3,5x35	35	3.5	0.60 - 0.88	≥ 2.8	1000	2007246
S-DS 01 B 3,5x41	41	3.5	0.60 - 0.88	≥ 2.8	1000	2007247
S-DS 01 B 3,5x45	45	3.5	0.60 - 0.88	≥ 2.8	1000	2007248
S-DS 01 B 3,5x55	55	3.5	0.60 - 0.88	≥ 2.8	500	2007249
S-DS 01 B 4,2x70	70	4.2	0.60 - 0.88	≥ 3.4	300	2007710
S-DS 01 B 4,2x80	80	4.2	0.60 - 0.88	≥ 3.4	250	2007711
S-DS 01 B 4,8x90	90	4.8	0.60 - 0.88	≥ 3.6	250	2007712
S-DS 01 B 4,8x100	100	4.8	0.60 - 0.88	≥ 3.6	100	2007713
S-DS 01 B 4,8x110	110	4.8	0.60 - 0.88	≥ 3.6	100	2007714
S-DS 01 B 4,8x120	120	4.8	0.60 - 0.88	≥ 3.6	100	2007715
S-DS 01 B 4,8x130	130	4.8	0.60 - 0.88	≥ 3.6	100	2007716
S-DS 01 B 4,8x140	140	4.8	0.60 - 0.88	≥ 3.6	100	2007717

Collated screws for SMD 57

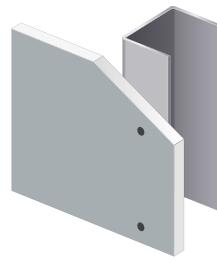
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 01 B 3,5x25 M	25	3.5	0.60 - 0.88	≥ 2.8	1000	2007779
S-DS 01 B 3,5x35 M	35	3.5	0.60 - 0.88	≥ 2.8	1000	2007780
S-DS 01 B 3,5x38 M	38	3.5	0.60 - 0.88	≥ 2.8	1000	2095777
S-DS 01 B 3,5x41 M	41	3.5	0.60 - 0.88	≥ 2.8	1000	2007781
S-DS 01 B 3,5x45 M	45	3.5	0.60 - 0.88	≥ 2.8	1000	2007782
S-DS 01 B 3,5x55 M	55	3.5	0.60 - 0.88	≥ 2.8	1000	2007783

Collated screws for SD-M 1 and SD-M 2

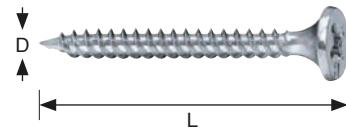
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DS 01 B 3,5x25 M1	25	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2134608
S-DS 01 B 3,5x25 M1 (10')	25	3.5	0.60 - 0.88	≥ 2.8	10000	■	■	2071046
S-DS 01 B 3,5x25 M1 L*	25	3.5	0.60 - 0.88	≥ 2.8	4000	■	■	2232903
S-DS 01 B 3,5x35 M1	35	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2134609
S-DS 01 B 3,5x35 M1 (10')	35	3.5	0.60 - 0.88	≥ 2.8	10000	■	■	2071047
S-DS 01 B 3,5x35 M1 L*	35	3.5	0.60 - 0.88	≥ 2.8	4000	■	■	2232904
S-DS 01 B 3,5x38 M1	38	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2244771
S-DS 01 B 3,5x41 M1	41	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2131087
S-DS 01 B 3,5x45 M1	45	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2131088
S-DS 01 B 3,5x51 M1	51	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2131089

*40 screw strip

S-DS 01 Z

Application:
Drywall boards to metal substructure ≤ 0.88 mm

Technical data:

Screw design	Stitch point - Fine thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 10mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	


Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 01 Z 3,5x25	25	3.5	0.60 - 0.88	≥ 2.8	1000	2007718
S-DS 01 Z 3,5x35	35	3.5	0.60 - 0.88	≥ 2.8	1000	2007719
S-DS 01 Z 3,5x45	45	3.5	0.60 - 0.88	≥ 2.8	1000	2007720
S-DS 01 Z 3,5x55	55	3.5	0.60 - 0.88	≥ 2.8	500	2007721

Collated screws for SMD 57

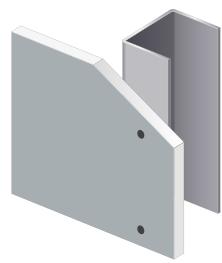
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 01 Z 3,5x22 M	22	3.5	0.60 - 0.88	≥ 2.8	1000	2056545
S-DS 01 Z 3,5x25 M	25	3.5	0.60 - 0.88	≥ 2.8	1000	2007788
S-DS 01 Z 3,5x35 M	35	3.5	0.60 - 0.88	≥ 2.8	1000	2007789
S-DS 01 Z 3,5x45 M	45	3.5	0.60 - 0.88	≥ 2.8	1000	2007790
S-DS 01 Z 3,5x55 M	55	3.5	0.60 - 0.88	≥ 2.8	1000	2007791

Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DS 01 Z 3,5x25 M1	25	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2133720
S-DS 01 Z 3,5x35 M1	35	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2131180
S-DS 01 Z 3,5x41 M1	41	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2133721
S-DS 01 Z 3,5x45 M1	45	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2131181
S-DS 01 Z 3,5x51 M1	51	3.5	0.60 - 0.88	≥ 2.8	1000	■	■	2133722

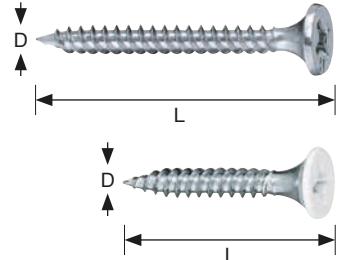
S-DS 01 Z

Application:
Drywall boards to metal substructure ≤ 0.88 mm



Technical data:

Screw design	Stitch point - Fine thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 10mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	



Single screws - MO Japan

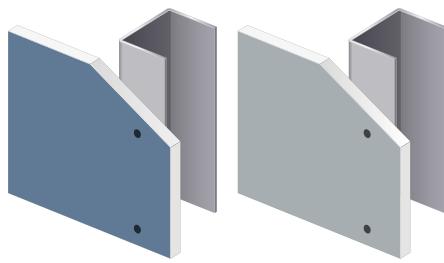
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 01 Z 3,0x20	20	3.0	0.60 - 0.88	≥ 1.5	1000	286947
S-DS 01 Z 3,0x20 PL03 (white head)	20	3.0	0.60 - 0.88	≥ 1.5	1000	286948
S-DS 01 Z 3,0x22	22	3.0	0.60 - 0.88	≥ 1.5	1000	228238
S-DS 01 Z 3,5x22	22	3.5	0.60 - 0.88	≥ 2.8	1000	286949
S-DS 01 Z 3,5x25	25	3.5	0.60 - 0.88	≥ 2.8	1000	228239
S-DS 01 Z 3,5x32	32	3.5	0.60 - 0.88	≥ 2.8	1000	228240

S-DD 01 B

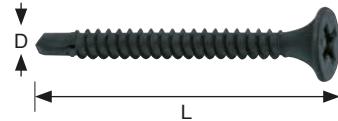
Application:

Drywall boards to metal substructure $\geq 0.75 \text{ mm} \leq 2.25 \text{ mm}$

Hard boards to metal substructure $\geq 0.75 \text{ mm} \leq 2.25 \text{ mm}$


Technical data:

Screw design	Drill point - Fine thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Phosphated
Penetration depth	Min. 10mm
Recommended rotation speed	2500 - 5000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	


Single screws

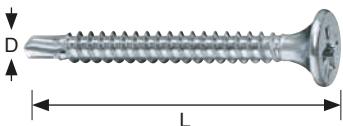
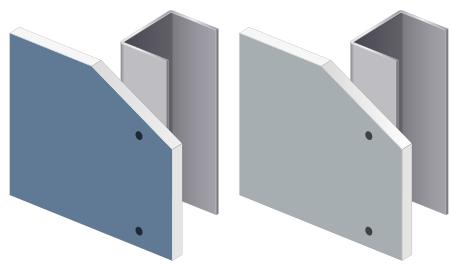
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 01 B 3,5x25	25	3.5	0.75 - 2.25	≥ 2.8	1000	2007752
S-DD 01 B 3,5x35	35	3.5	0.75 - 2.25	≥ 2.8	1000	2007753
S-DD 01 B 3,5x45	45	3.5	0.75 - 2.25	≥ 2.8	1000	2007754
S-DD 01 B 3,5x50	50	3.5	0.75 - 2.25	≥ 2.8	500	2007755
S-DD 01 B 3,5x55	55	3.5	0.75 - 2.25	≥ 2.8	500	2007756

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 01 B 3,5x25 M	25	3.5	0.75 - 2.25	≥ 2.8	1000	2007597
S-DD 01 B 3,5x35 M	35	3.5	0.75 - 2.25	≥ 2.8	1000	2007598
S-DD 01 B 3,5x41 M	41	3.5	0.75 - 2.25	≥ 2.8	1000	2007599
S-DD 01 B 3,5x45 M	45	3.5	0.75 - 2.25	≥ 2.8	1000	2007770
S-DD 01 B 3,5x55 M	55	3.5	0.75 - 2.25	≥ 2.8	1000	2011723

Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DD 01 B 3,5x25 M1	25	3.5	0.75 - 2.25	≥ 2.8	1000	■	■	2133730
S-DD 01 B 3,5x25 M1 (10')	25	3.5	0.75 - 2.25	≥ 2.8	10000	■	■	2071049
S-DD 01 B 3,5x35 M1	35	3.5	0.75 - 2.25	≥ 2.8	1000	■	■	2133731
S-DD 01 B 3,5x35 M1 (10')	35	3.5	0.75 - 2.25	≥ 2.8	10000	■	■	2071050
S-DD 01 B 3,5x41 M1	41	3.5	0.75 - 2.25	≥ 2.8	1000	■		2131184
S-DD 01 B 3,5x45 M1	45	3.5	0.75 - 2.25	≥ 2.8	1000	■		2131185
S-DD 01 B 3,5x51 M1	51	3.5	0.75 - 2.25	≥ 2.8	1000	■		2133732

Interior finishing screws**S-DD 01 Z****Application:****Drywall boards to metal substructure $\geq 0.75 \text{ mm} \leq 2.25 \text{ mm}$** **Hard boards to metal substructure $\geq 0.75 \text{ mm} \leq 2.25 \text{ mm}$** **Technical data:**

Screw design	Drill point - Fine thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 10mm
Recommended rotation speed	2500 - 5000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 01 Z 3,5x25	25	3.5	0.75 - 2.25	≥ 2.8	1000	2007757
S-DD 01 Z 3,5x32	32	3.5	0.75 - 2.25	≥ 2.8	1000	2007758
S-DD 01 Z 3,5x35	35	3.5	0.75 - 2.25	≥ 2.8	1000	2007759
S-DD 01 Z 3,5x45	45	3.5	0.75 - 2.25	≥ 2.8	1000	2007760
S-DD 01 Z 3,5x50	50	3.5	0.75 - 2.25	≥ 2.8	500	2007761
S-DD 01 Z 3,5x65	65	3.5	0.75 - 2.25	≥ 2.8	300	2007762

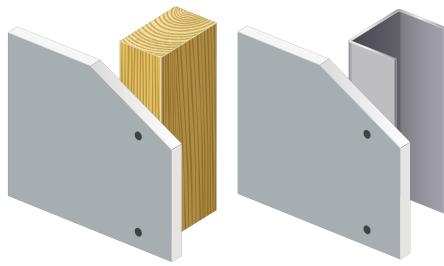
Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 01 Z 3,5x25 M	25	3.5	0.75 - 2.25	≥ 2.8	1000	2056546
S-DD 01 Z 3,5x32 M	32	3.5	0.75 - 2.25	≥ 2.8	1000	2007775
S-DD 01 Z 3,5x41 M	41	3.5	0.75 - 2.25	≥ 2.8	1000	2007776
S-DD 01 Z 3,5x50 M	50	3.5	0.75 - 2.25	≥ 2.8	1000	2007777

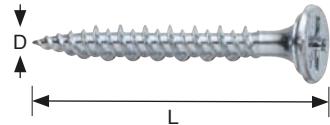
Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DD 01 Z 3,5x25 M1	25	3.5	0.75 - 2.25	≥ 2.8	1000	■	■	2133733
S-DD 01 Z 3,5x35 M1	35	3.5	0.75 - 2.25	≥ 2.8	1000	■	■	2133734
S-DD 01 Z 3,5x41 M1	41	3.5	0.75 - 2.25	≥ 2.8	1000	■	■	2133735
S-DD 01 Z 3,5x45 M1	45	3.5	0.75 - 2.25	≥ 2.8	1000	■	■	2131186
S-DD 01 Z 3,5x51 M1	51	3.5	0.75 - 2.25	≥ 2.8	1000	■	■	2133736

S-DS 02 Z

Application:
Drywall boards to metal substructure ≤ 0.88 mm
Drywall boards to wood substructure

Technical data:

Screw design	Stitch point - Hi/Lo thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth, metal	Min. 10mm
Penetration depth, wood	Min. 20mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load, metal	≥ 300 N
Pull-out load, wood	≥ 450 N
Standard	EN 14566
Environmental conditions	


Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 02 Z 3,9x32	32	3.9	0.60 - 0.88	≥ 2.8	1000	2101572
S-DS 02 Z 3,9x41	41	3.9	0.60 - 0.88	≥ 2.8	1000	2101573
S-DS 02 Z 3,9x51	51	3.9	0.60 - 0.88	≥ 2.8	500	2101574

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 02 Z 3,9x32 M	32	3.9	0.60 - 0.88	≥ 2.8	1000	2101575
S-DS 02 Z 3,9x41 M	41	3.9	0.60 - 0.88	≥ 2.8	1000	2101576
S-DS 02 Z 3,9x51 M	51	3.9	0.60 - 0.88	≥ 2.8	1000	2101577

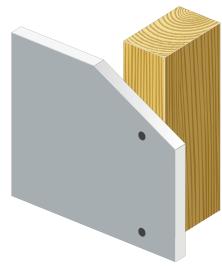
Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DS 02 Z 3,9x32 M1	32	3.9	0.60 - 0.88	≥ 2.8	1000	■	■	2133740
S-DS 02 Z 3,9x41 M1	41	3.9	0.60 - 0.88	≥ 2.8	1000	■	■	2131188
S-DS 02 Z 3,9x51 M1	51	3.9	0.60 - 0.88	≥ 2.8	1000	■	■	2133741

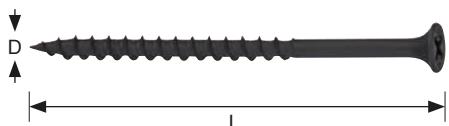
Interior finishing screws

S-DS 03 B

Application:
Drywall boards to wood substructure

**Technical data:**

Screw design ≤ 55mm	Stitch point - Coarse thread - Bugle head
Screw design ≥ 70mm	Stitch point - Shank - Coarse thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Phosphated
Penetration depth	Min. 20mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 03 B 4,0x25	25	4.0	-	≥ 3.4	1000	2007726
S-DS 03 B 4,0x30	30	4.0	-	≥ 3.4	1000	2007727
S-DS 03 B 4,0x35	35	4.0	-	≥ 3.4	1000	2007728
S-DS 03 B 4,0x41	41	4.0	-	≥ 3.4	1000	2007729
S-DS 03 B 4,0x45	45	4.0	-	≥ 3.4	1000	2007730
S-DS 03 B 4,0x55	55	4.0	-	≥ 3.4	500	2007731
S-DS 03 B 4,3x70	70	4.3	-	≥ 3.6	300	2007732
S-DS 03 B 4,3x90	90	4.3	-	≥ 3.6	250	2007733

Collated screws for SMD 57

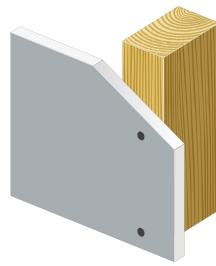
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 03 B 4,0x25 M	25	4.0	-	≥ 3.4	1000	2007792
S-DS 03 B 4,0x30 M	30	4.0	-	≥ 3.4	1000	2007793
S-DS 03 B 4,0x35 M	35	4.0	-	≥ 3.4	1000	2007794
S-DS 03 B 4,0x41 M	41	4.0	-	≥ 3.4	1000	2031583
S-DS 03 B 4,0x45 M	45	4.0	-	≥ 3.4	1000	2007795
S-DS 03 B 4,0x55 M	55	4.0	-	≥ 3.4	1000	2007796

Collated screws for SD-M1 and SD-M2

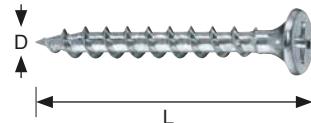
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DS 03 B 4,0x30 M1	30	4.0	-	≥ 3.4	1000	■	■	2133723
S-DS 03 B 4,0x35 M1	35	4.0	-	≥ 3.4	1000	■	■	2131182
S-DS 03 B 4,0x35 M1 (10')	35	4.0	-	≥ 3.4	10000	■	■	2071048
S-DS 03 B 4,0x35 M1 L*	35	4.0	-	≥ 3.4	4000	■	■	2232905
S-DS 03 B 4,0x41 M1	41	4.0	-	≥ 3.4	1000	■	■	2133724
S-DS 03 B 4,0x45 M1	45	4.0	-	≥ 3.4	1000	■	■	2133725
S-DS 03 B 4,0x51 M1	51	4.0	-	≥ 3.4	1000	■	■	2131183

*40 screw strip

S-DS 03 Z

Application:
Drywall boards to wood substructure

Technical data:

Screw design	Stitch point - Coarse thread - Bugle head		
Screw drive / recess type	PH2		
Material	Carbon steel		
Coating	Zinc plated		
Penetration depth	Min. 20mm		
Recommended rotation speed	4500 - 6000 rpm		
Pull-out load	$\geq 450 \text{ N}$		
Standard	EN 14566		
Environmental conditions			


Single screws

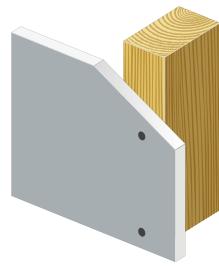
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 03 Z 4,0x35	35	4.0	-	≥ 3.4	1000	2007734
S-DS 03 Z 4,0x41	41	4.0	-	≥ 3.4	1000	2007735
S-DS 03 Z 4,0x55	55	4.0	-	≥ 3.4	500	2007736

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 03 Z 4,0x25 M	25	4.0	-	≥ 3.4	1000	2007798
S-DS 03 Z 4,0x35 M	35	4.0	-	≥ 3.4	1000	2007799
S-DS 03 Z 4,0x41 M	41	4.0	-	≥ 3.4	1000	2007800
S-DS 03 Z 4,0x45 M	45	4.0	-	≥ 3.4	1000	2007801
S-DS 03 Z 4,0x55 M	55	4.0	-	≥ 3.4	1000	2031584

Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DS 03 Z 4,0x35 M1	35	4.0	-	≥ 3.4	1000	■	■	2133726
S-DS 03 Z 4,0x41 M1	41	4.0	-	≥ 3.4	1000	■	■	2133727
S-DS 03 Z 4,0x45 M1	45	4.0	-	≥ 3.4	1000	■	■	2133728
S-DS 03 Z 4,0x51 M1	51	4.0	-	≥ 3.4	1000	■	■	2133729

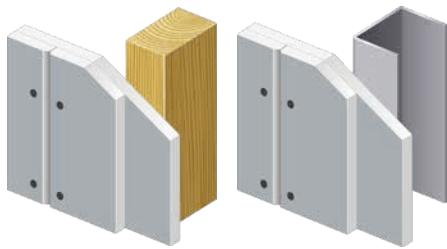
Interior finishing screws**S-DS 03 S****Application:****Drywall boards to wood substructure****Lost formwork for Promat fire boards****Technical data:**

Screw design	Stitch point - Coarse thread - Bugle head
Screw drive / recess type	PH2
Material	A2 stainless steel
Coating	No coating
Penetration depth	Min. 20mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	 1-10km

**Collated screws for SMD 57**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 03 S 5,0x50 M A2	50	5.0	-	-	1000	388454

S-DS 04 B

Application:**Drywall boards to drywall boards****Technical data:**

Screw design	Stitch point - Coarse thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Phosphated
Penetration depth	Min. 10mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 04 B 5,5x38	38	5.5	-	≥ 6.0	750	2007737

S-DS 05 B

Application:

Metal framing - overall thickness of fastened materials \leq 1,00 mm

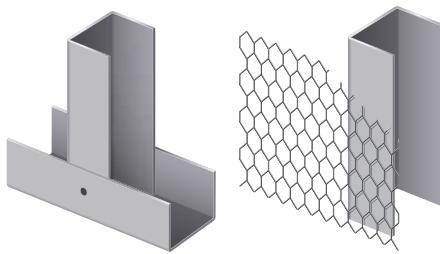

Technical data:

Screw design	Stitch point - Fine thread - Pan head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Phosphated
Penetration depth	min. 10mm
Recommended rotation speed	1800 - 2500 rpm
Pull-out load	\geq 450 N
Standard	EN 14566
Environmental conditions	

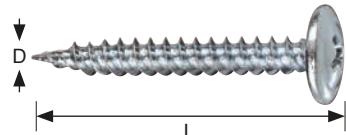

Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 05 B 3,9x11	11	3.9	0.50 - 0.88	\geq 3.4	1000	388457

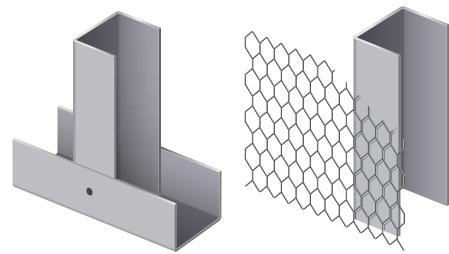
S-DS 06 Z

Application:**Metal framing - overall thickness of fastened materials $\leq 0,88$ mm****Wire lath to metal substructure ≤ 0.88 mm****Technical data:**

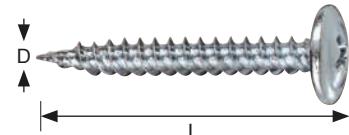
Screw design	Stitch point - Fine thread - Wafer head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 10mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 06 Z 4,2x13	13	4.2	0.60 - 0.88	≥ 3.4	1000	2007738
S-DS 06 Z 4,2x32	32	4.2	0.60 - 0.88	≥ 3.4	1000	2007739

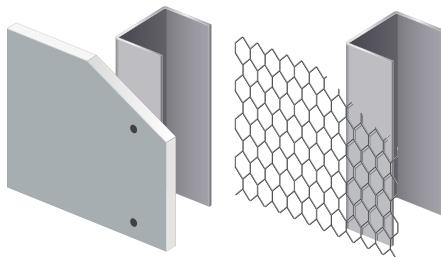
Interior finishing screws**S-DS 06 C****Application:****Metal framing - overall thickness of fastened materials \leq 0,88 mm****Wire lath to metal substructure \leq 0,88 mm****Technical data:**

Screw design	Stitch point - Fine thread - Wafer head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Duplex-Coated
Penetration depth	Min. 10mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	\geq 450 N
Standard	EN 14566
Environmental conditions	1-10Km

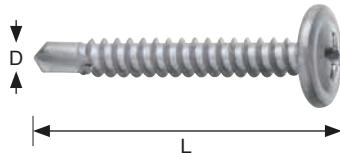
**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 06 C 4,2x25	25	4.2	0.60 - 0.88	\geq 3.5	1000	400745
S-DS 06 C 4,2x32	32	4.2	0.60 - 0.88	\geq 3.5	1000	400746

S-DD 06 C

Application:**Drywall to metal 2.50 mm****Wire lath to metal 2.50 mm****Technical data:**

Screw design	Drill point - Fine thread - Wafer head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Duplex-Coated
Penetration depth	Min. 10mm
Recommended rotation speed	2000 - 3000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	



CE

Single screws


Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 06 C 4,2x25	25	4.2	0.75 - 2.50	≥ 5.4	1000	400748
S-DD 06 C 4,2x31	31	4.2	0.75 - 2.50	≥ 5.4	1000	400747

S-DS 07 Z

Application:
Metal framing - overall thickness of fastened materials \leq 1.20 mm

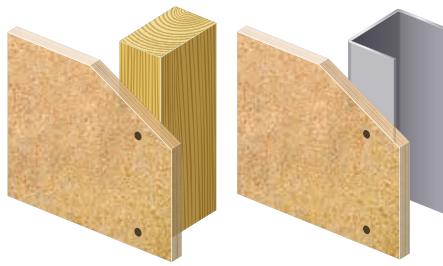
Technical data:

Screw design	Stitch point - Fine thread - Countersunk head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 10mm
Recommended rotation speed	1800 - 2500 rpm
Pull-out load	\geq 450 N
Standard	EN 14566
Environmental conditions	

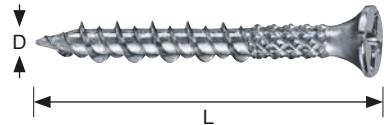

Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 07 Z 4,0x14	14	4.0	0.50 - 1.20	\geq 5.9	1000	273769

S-DS 10 Z

Application:
Fibre boards to metal substructure ≤ 0.88 mm
Fibre boards to wood substructure

Technical data:

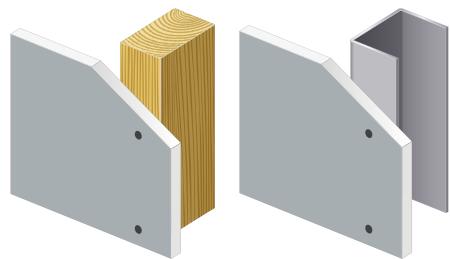
Screw design	Stitch point - Hi/Lo thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth, metal	Min. 10mm
Penetration depth, wood	Min. 20mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load, metal	≥ 300 N
Pull-out load, wood	≥ 450 N
Standard	EN 14566
Environmental conditions	


Single screws

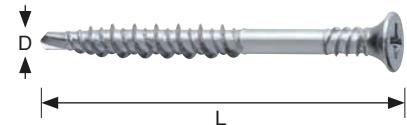
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 10 Z 3,9x25	25	3.9	0.60 - 0.88	≥ 2.8	1000	2007740
S-DS 10 Z 3,9x32	32	3.9	0.60 - 0.88	≥ 2.8	1000	2007741
S-DS 10 Z 3,9x41	41	3.9	0.60 - 0.88	≥ 2.8	1000	2007742

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 10 Z 3,9x25 M	25	3.9	0.60 - 0.88	≥ 2.8	1000	2007802
S-DS 10 Z 3,9x32 M	32	3.9	0.60 - 0.88	≥ 2.8	1000	2007803
S-DS 10 Z 3,9x41 M	41	3.9	0.60 - 0.88	≥ 2.8	1000	2007804

Interior finishing screws**S-DD 10 Z****Application:****Drywall and hardboards to metal (max. 2.00 mm) and wood framing****Fibre boards to metal (max. 2.00 mm) and wood framing****Technical data:**

Screw design	Drill point - Hi/Lo thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth, metal	Min. 10mm
Penetration depth, wood	Min. 20mm
Recommended rotation speed	2000 - 3000 rpm
Pull-out load, metal	$\geq 300 \text{ N}$
Pull-out load, wood	$\geq 450 \text{ N}$
Standard	EN 14566
Enviromental conditions	

**CE****Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 10 Z 4,8x32	32	4.8	0.75 - 2.00	≥ 5.6	250	386074
S-DD 10 Z 4,8x51	51	4.8	0.75 - 2.00	≥ 5.6	250	386075
S-DD 10 Z 4,8x64	64	4.8	0.75 - 2.00	≥ 5.6	250	386076
S-DD 10 Z 4,8x85	85	4.8	0.75 - 2.00	≥ 5.6	250	386077

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 10 Z 4,5x32 M	32	4.5	0.75 - 2.00	≥ 3.5	250	386078
S-DD 10 Z 4,5x51 M	51	4.5	0.75 - 2.00	≥ 3.5	250	386191

S-DD 10 C

Application:

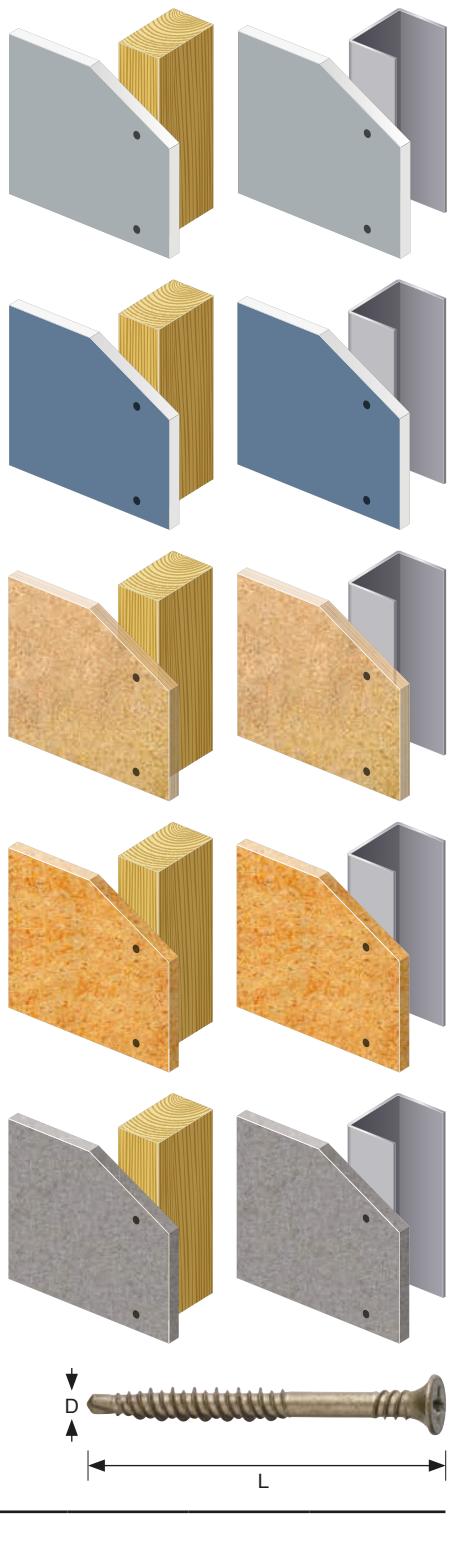
Drywall and hardboards to metal (max. 2.00 mm) and wood framing

Exterior boards to metal (max. 2.00 mm) and wood framing

Fibre boards to metal (max. 2.00 mm) and wood framing

Technical data:

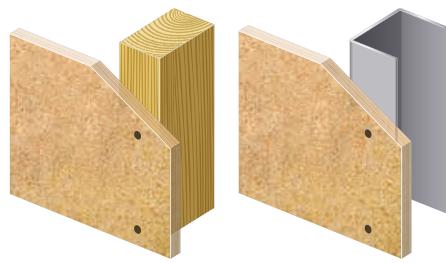
Screw design	Drill point - Hi/Lo thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Duplex-Coated
Penetration depth, metal	Min. 10mm
Penetration depth, wood	Min. 20mm
Recommended rotation speed	2000 - 3000 rpm
Pull-out load, metal	≥ 300 N
Pull-out load, wood	≥ 450 N
Standard	EN 14566
Environmental conditions	


Single screws

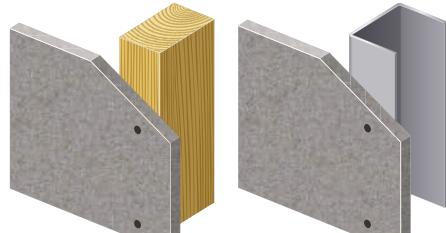
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 10 C 4,8x32	32	4.8	0.75 - 2.00	≥ 5.6	250	386063
S-DD 10 C 4,8x51	51	4.8	0.75 - 2.00	≥ 5.6	250	386064
S-DD 10 C 4,8x64	64	4.8	0.75 - 2.00	≥ 5.6	250	386065
S-DD 10 C 4,8x85	85	4.8	0.75 - 2.00	≥ 5.6	250	386066

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 10 C 4,5x32 M	32	4.5	0.75 - 2.00	≥ 3.5	1000	386067
S-DD 10 C 4,5x51 M	51	4.5	0.75 - 2.00	≥ 3.5	1000	386068

Interior finishing screws**S-DS 14 B****Application:****Fibre boards to wood and metal substructure ≤ 0.88 mm****Fermacell boards to wood and metal substructure ≤ 0.88 mm****Technical data:**

Screw design	Stitch point - Fine thread - Countersunk head	
Screw drive / recess type	PH2	
Material	Carbon steel	
Coating	Phosphated	
Penetration depth	Min. 10mm	
Recommended rotation speed	4500 - 6000 rpm	
Pull-out load	≥ 450 N	
Standard	EN 14566	
Environmental conditions		

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 14 B 4,0x19	19	4.0	0.60 - 0.88	≥ 3.4	1000	2007743
S-DS 14 B 4,0x22	22	4.0	0.60 - 0.88	≥ 3.4	1000	2007744
S-DS 14 B 4,0x25	25	4.0	0.60 - 0.88	≥ 3.4	1000	2007745
S-DS 14 B 4,0x30	30	4.0	0.60 - 0.88	≥ 3.4	1000	2007746
S-DS 14 B 4,0x35	35	4.0	0.60 - 0.88	≥ 3.4	1000	2007747
S-DS 14 B 4,0x45	45	4.0	0.60 - 0.88	≥ 3.4	1000	2007748

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 14 B 4,0x25 M	25	4.0	0.60 - 0.88	≥ 3.4	1000	2007805
S-DS 14 B 4,0x30 M	30	4.0	0.60 - 0.88	≥ 3.4	1000	2007806
S-DS 14 B 4,0x35 M	35	4.0	0.60 - 0.88	≥ 3.4	1000	2007808
S-DS 14 B 4,0x45 M	45	4.0	0.60 - 0.88	≥ 3.4	1000	2007807


Collated screws for SD-M1 and SD-M2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DS 14 B 4,0x25 M1	25	4.0	0.60 - 0.88	≥ 3.4	1000	■	■	2133737
S-DS 14 B 4,0x35 M1	35	4.0	0.60 - 0.88	≥ 3.4	1000	■	■	2131187
S-DS 14 B 4,0x45 M1	45	4.0	0.60 - 0.88	≥ 3.4	1000	■	■	2133738
S-DS 14 B 4,0x51 M1	51	4.0	0.60 - 0.88	≥ 3.4	1000	■	■	2133739

S-DS 14 Z

Application:**Fibre boards to metal substructure ≤ 0.88 mm****Technical data:**

Screw design	Stitch point - Fine thread - Countersunk head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 10mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	



CE

Single screws*

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 14 Z 3,0x20	20	3.0	0.60 - 0.88	≥ 1.5	1000	286950

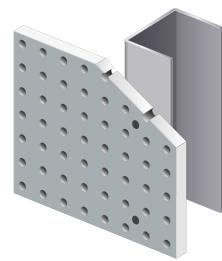
* no CE

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 14 Z 4,0x25 M	25	4.0	0.60 - 0.88	≥ 3.4	1000	2007809

Interior finishing screws**S-DS 16 B**

Application:
Acoustic boards to metal substructure ≤ 0.88 mm

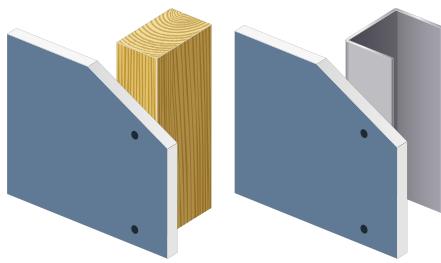
**Technical data:**

Screw design	Stitch point - Fine thread - Countersunk head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Phosphated
Penetration depth	Min. 10mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 16 B 3,5x30	30	3.5	0.60 - 0.88	≥ 2.8	1000	2156350

S-DS 20 B (EXCEPT HABITO)

Application:
Hard boards to metal substructure ≤ 0.88 mm
Hard boards to wood substructure

Technical data:

Screw design	Stitch point - Fine and counter thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Phosphated
Penetration depth	Min. 10mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	


Single screws

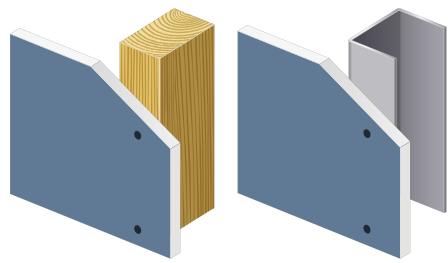
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 20 B 3,9x25	25	3.9	0.60 - 0.88	≥ 3.4	1000	2065472
S-DS 20 B 3,9x35	35	3.9	0.60 - 0.88	≥ 3.4	1000	2065473
S-DS 20 B 3,9x45	45	3.9	0.60 - 0.88	≥ 3.4	1000	2065474

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 20 B 3,9x25 M	25	3.9	0.60 - 0.88	≥ 3.4	1000	2065475
S-DS 20 B 3,9x35 M	35	3.9	0.60 - 0.88	≥ 3.4	1000	2065476
S-DS 20 B 3,9x45 M	45	3.9	0.60 - 0.88	≥ 3.4	1000	2065477

Collated screws for SD-M1 and SD-M2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DS 20 B 3,9x25 M1	25	3.9	0.60 - 0.88	≥ 3.4	1000	■	■	2135876
S-DS 20 B 3,9x35 M1	35	3.9	0.60 - 0.88	≥ 3.4	1000	■	■	2135877
S-DS 20 B 3,9x45 M1	45	3.9	0.60 - 0.88	≥ 3.4	1000	■	■	2135878

Interior finishing screws**S-DS 22 B (ALL HARD BOARD TYPES)****Application:****Hard boards to metal substructure ≤ 0.88 mm****Hard boards to wood substructure****Technical data:**

Screw design	Wing tip – Fine and counter thread – Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Phosphated
Penetration depth	Min. 10mm
Recommended rotation speed	4500 - 6000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 22 B 3,9x25	25	3.9	0.60 - 0.88	≥ 3.4	1000	2247541
S-DS 22 B 3,9x37	37	3.9	0.60 - 0.88	≥ 3.4	1000	2247542
S-DS 22 B 3,9x49	49	3.9	0.60 - 0.88	≥ 3.4	1000	2247543

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DS 22 B 3,9x25 M	25	3.9	0.60 - 0.88	≥ 3.4	1000	2247544
S-DS 22 B 3,9x37 M	37	3.9	0.60 - 0.88	≥ 3.4	1000	2247545
S-DS 22 B 3,9x49 M	49	3.9	0.60 - 0.88	≥ 3.4	1000	2247546

Collated screws for SD-M1 and SD-M2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DS 22 B 3,9x25 M1	25	3.9	0.60 - 0.88	≥ 3.4	1000	■	■	2247547
S-DS 22 B 3,9x37 M1	37	3.9	0.60 - 0.88	≥ 3.4	1000	■	■	2247399
S-DS 22 B 3,9x49 M1	49	3.9	0.60 - 0.88	≥ 3.4	1000	■	■	2247540

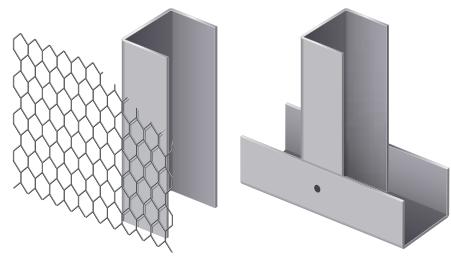
S-DD 02 Z

Application:Metal framing - overall thickness of fastened materials \leq 2,75 mm**Technical data:**


Screw design	Drill point - Fine thread - Pan head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Thickness fastened (MF) steel	max. 3mm
Recommended rotation speed	1800 - 2500 rpm
Pull-out load	\geq 450 N
Standard	EN 14566
Environmental conditions	

**CE****Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 02 Z 3,9x11	11	3.9	0.75 - 2.75	\geq 3.4	1000	2315225

Interior finishing screws**S-DD 03 Z****Application:****Metal framing - overall thickness of fastened materials \leq 2,50 mm****Wire lath to metal substructure****Technical data:**

Screw design	Drill point - Fine thread - Wafer head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 10mm
Recommended rotation speed	1800 - 2500 rpm
Pull-out load	\geq 450 N
Standard	EN 14566
Environmental conditions	

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 03 Z 4,2x13	13	4.2	0.88 - 2.50	\geq 5.4	1000	2315223
S-DD 03 Z 4,2x25	25	4.2	0.88 - 2.50	\geq 5.4	1000	2315224

S-DD 03 Z LH

Application:Metal framing - overall thickness of fastened materials \leq 3,00 mm**Technical data:**

Screw design	Drill point - Fine thread - Low head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 10mm
Recommended rotation speed	1800 - 2500 rpm
Pull-out load	\geq 450 N
Standard	EN 14566
Environmental conditions	


**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 03 Z 4,2x15 LH	15	4.2	0.75 - 2.00	\geq 5.4	1000	2125878
S-DD 03 Z 4,8x17 LH	17	4.8	0.75 - 3.00	\geq 7.0	1000	2125877

S-DD 07 Z

Application:

Metal framing - overall thickness of fastened materials ≤ 2,75 mm


Technical data:

Screw design	Drill point - Fine thread - Countersunk head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Thickness fastened (MF) steel	max. 3mm
Recommended rotation speed	1800 - 2500 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	


Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 07 Z 4,0x13	13	4.0	0.75 - 2.75	≥ 3.6	1000	273770

S-DD 08 Z

Application:Metal framing - overall thickness of fastened materials \leq 2,75 mm**Technical data:**

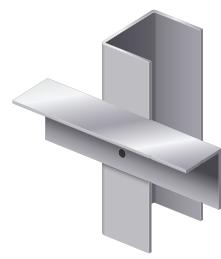
Screw design	Drill point - Fine thread - Pan head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Thickness fastened (MF) steel	max. 3mm
Recommended rotation speed	1800 - 2500 rpm
Pull-out load	\geq 450 N
Standard	EN 14566
Environmental conditions	

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 08 Z 3,5x9,5	9.5	3.5	0.75 - 2.75	\geq 2.8	1000	2315226

S-MD 03 PZ

Application:
Metal track to door frame



Technical data:

Screw design	Drill point - Fine thread - Pan head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 10mm
Recommended rotation speed	1800 - 2500 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	



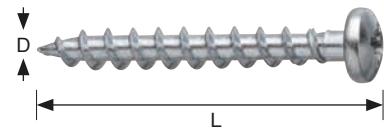
Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-MD 03 PZ 4,8x16	16	4.8	2.80 - 4.50	≥ 6.9	500	388931

S-WS 03 Z

Application:**Fastening electrical sockets to wood****Technical data:**

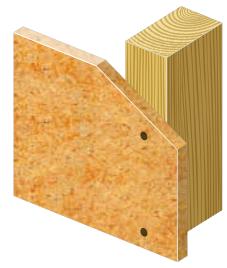
Screw design	Stitch point - Coarse thread - Pan head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 20mm
Recommended rotation speed	2500 - 5000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	

**Single screws**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 03 Z 4,2x22	22	4.2	-	≥ 3.5	500	413321
S-WS 03 Z 4,2x35	35	4.2	-	≥ 3.5	500	413322
S-WS 03 Z 4,2x45	45	4.2	-	≥ 3.5	200	413323
S-WS 03 Z 4,2x55	55	4.2	-	≥ 3.5	200	413324

S-WS 04 B

Application:
Wood to wood connection in suspended ceilings



Technical data:

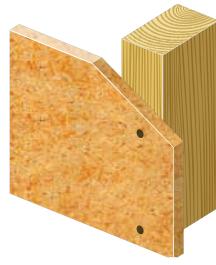
Screw design	Stitch point - Coarse thread - Wafer head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Phosphated
Penetration depth	Min. 15mm
Recommended rotation speed	2500 - 5000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	



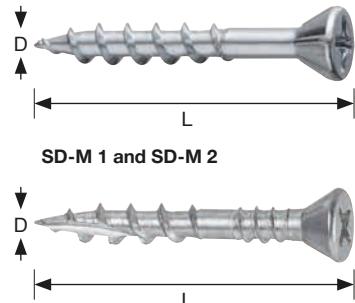
Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 04 B 4,2x17	17	4.2	-	≥ 3.5	1000	413807

S-WS 08 Z

Application:
Wood boards to wood substructure

Technical data:

Screw design	Stitch point - Coarse thread - Countersunk head			
Screw drive / recess type	PH2			
Material	Carbon steel			
Coating	Zinc plated			
Penetration depth	Min. 20mm			
Recommended rotation speed	2500 - 5000 rpm			
Pull-out load	$\geq 450 \text{ N}$			
Standard	EN 14566			
Environmental conditions				

Single and SMD 57

SD-M 1 and SD-M 2

Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 08 Z 3,9x30	30	3.9	-	≥ 2.8	1000	387987
S-WS 08 Z 3,9x41	41	3.9	-	≥ 2.8	1000	388014
S-WS 08 Z 4,2x51	51	4.2	-	≥ 3.5	500	388015

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 08 Z 4,2x30 M	30	4.2	-	≥ 3.5	1000	388025
S-WS 08 Z 4,2x41 M	41	4.2	-	≥ 3.5	1000	400759
S-WS 08 Z 4,2x51 M	51	4.2	-	≥ 3.5	1000	388092

Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-WS 08 Z 4,2x32 M1	32	4.2	-	≥ 3.5	1000	■	■	2133742
S-WS 08 Z 4,2x41 M1	41	4.2	-	≥ 3.5	1000	■	■	2130995
S-WS 08 Z 4,2x51 M1	51	4.2	-	≥ 3.5	1000	■	■	2133743

S-WS 08 C

Application:
Fastening exterior wood decks to wood substructure
Fastening wood details to wood substructure

Technical data:

Screw design	Cut point - Fine thread - Countersunk head
Screw drive / recess type, single	TX20
Screw drive / recess type, collated	PH2
Material	Carbon steel
Coating	Duplex-Coated
Penetration depth	Min. 20mm
Recommended rotation speed	2000 - 3000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	 1-10km


Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 08 C 4,2x41	41	4.2	-	≥ 3.5	500	400755
S-WS 08 C 4,2x57	57	4.2	-	≥ 3.5	500	400756
S-WS 08 C 4,8x75	75	4.8	-	≥ 5.6	250	386069

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 08 C 4,2x41	41	4.2	-	≥ 3.5	1000	400757
S-WS 08 C 4,2x51	51	4.2	-	≥ 3.5	1000	400758

S-WS 08 S

Application:**Fastening exterior wood decks to wood substructure****Technical data:**

Screw design	Stitch point - Coarse thread - Countersunk head
Screw drive / recess type	PH2
Material	A2 stainless steel
Coating	Zincotech Au
Penetration depth	Min. 20mm
Recommended rotation speed	2000 - 3000 rpm
Pull-out load	≥ 450 N
Standard	EN 14566
Environmental conditions	 1-10km

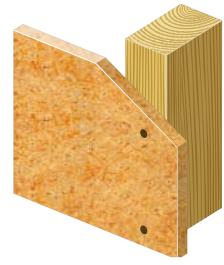
**Collated screws for SMD 57**

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 08 S 4,2x41 M	41	4.2	-	≥ 3.5	1000	386072
S-WS 08 S 4,2x51 M	51	4.2	-	≥ 3.5	1000	386073

S-WS 11 Z

Application:

- Universal screw - fastening wood or drywall boards to wood or metal substructure**
Fastening reinforcing metal sheets on top of drywall boards to metal substructure
Fastening reinforcing metal sheets on top of drywall boards to wood substructure

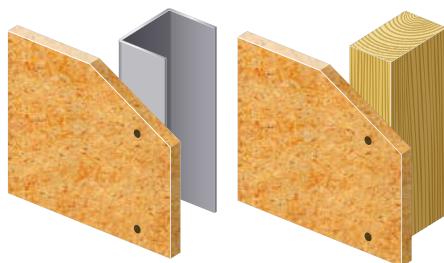

Technical data:

Screw design	Stitch point - Fine thread - Wafer head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 20mm
Recommended rotation speed	2000 - 3000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	


Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 11 Z 4,2x45	45	4.2	-	≥ 3.5	500	2107698
S-WS 11 Z 4,2x65	65	4.2	-	≥ 3.5	250	2107699
S-WS 11 Z 4,2x75	75	4.2	-	≥ 3.5	250	2107850
S-WS 11 Z 4,2x85	85	4.2	-	≥ 3.5	200	2107851
S-WS 11 Z 4,8x100	100	4.8	-	≥ 5.6	100	400744

S-WS 12 Z

Application:**Wood boards to wood substructure****Wood boards to metal substructure ≤ 0.88 mm****Technical data:**

Screw design	Stitch point - Hi/Lo thread - Countersunk head		
Screw drive / recess type	PH2		
Material	Carbon steel		
Coating	Zinc plated		
Penetration depth, metal	Min. 10mm		
Penetration depth, wood	Min. 20mm		
Recommended rotation speed	2500 - 5000 rpm		
Pull-out load, metal	≥ 300 N		
Pull-out load, wood	≥ 450 N		
Standard	EN 14566		
Environmental conditions			

Single screws

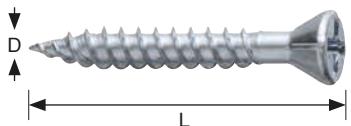
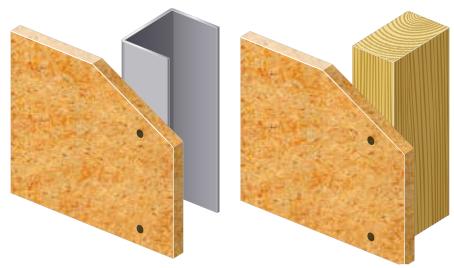
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 12 Z 4,2x30	30	4.2	0.60 - 0.88	≥ 3.5	1000	400760

Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 12 Z 4,2x30 M	30	4.2	0.60 - 0.88	≥ 3.5	1000	400763

Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-WS 12 Z 4,2x32 M1	32	4.2	0.60 - 0.88	≥ 3.5	1000	■	■	2133744
S-WS 12 Z 4,2x41 M1	41	4.2	0.60 - 0.88	≥ 3.5	1000	■	■	2130996

Interior finishing screws**S-WS 13 Z****Application:****Wood boards to metal substructure ≤ 0.88 mm****Wood boards to wood substructure****Technical data:**

Screw design	Stitch point - Fine thread - Countersunk head				
Screw drive / recess type	PH2				
Material	Carbon steel				
Coating	Zinc plated				
Penetration depth	Min. 10mm				
Recommended rotation speed	2500 - 5000 rpm				
Pull-out load	≥ 300 N				
Standard	EN 14566				
Environmental conditions					

Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 13 Z 3,9x30	30	3.9	0.60 - 0.88	≥ 3.5	1000	400761

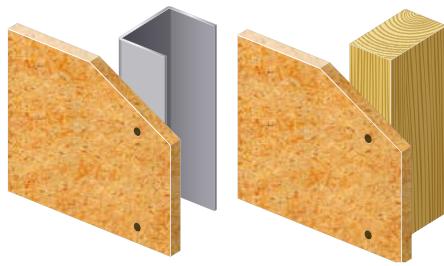
Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 13 Z 3,9x30 M	30	3.9	0.60 - 0.88	≥ 3.5	1000	400762
S-WS 13 Z 3,9x41 M	41	3.9	0.60 - 0.88	≥ 3.5	1000	400739

Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-WS 13 Z 3,9x32 M1	32	3.9	0.60 - 0.88	≥ 3.5	1000	■	■	2133745
S-WS 13 Z 3,9x41 M1	41	3.9	0.60 - 0.88	≥ 3.5	1000	■	■	2130997

S-WS 13 B

Application:
Wood boards to metal substructure ≤ 0.88 mm
Wood boards to wood substructure

Technical data:

Screw design	Stitch point - Fine thread - Countersunk head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Phosphated
Penetration depth	Min. 10mm
Recommended rotation speed	2500 - 5000 rpm
Pull-out load	≥ 300 N
Standard	EN 14566
Environmental conditions	

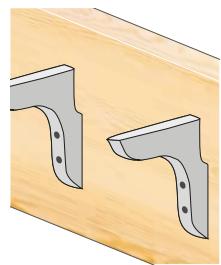
Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 13 B 3,9x25 M	25	3.9	0.60 - 0.88	≥ 3.5	1000	2293822
S-WS 13 B 3,9x30 M	30	3.9	0.60 - 0.88	≥ 3.5	1000	2293823
S-WS 13 B 3,9x41 M	41	3.9	0.60 - 0.88	≥ 3.5	1000	2293824

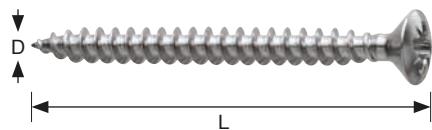
Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-WS 13 B 3,9x25 M1	25	3.9	0.60 - 0.88	≥ 3.5	1000	■	■	2293825
S-WS 13 B 3,9x30 M1	30	3.9	0.60 - 0.88	≥ 3.5	1000	■	■	2293826
S-WS 13 B 3,9x41 M1	41	3.9	0.60 - 0.88	≥ 3.5	1000	■	■	2293827

S-WS 16 S

Application:
Wood boards to wood substructure
Fastening sanitary equipment to wood substructure

Technical data:

Screw design	Stitch point - Coarse thread - Hex head
Screw drive / recess type, D=4.0	PZ2
Screw drive / recess type, D=5.5	PZ3
Material	A2 stainless steel
Coating	No coating
Penetration depth	Min. 20mm
Recommended rotation speed	2000 - 3000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	 1-10km


Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 16 S 4,0x30	30	4.0	-	-	100	416942
S-WS 16 S 5,5x40	40	5.5	-	-	100	416943
S-WS 16 S 5,5x50	50	5.5	-	-	100	416944
S-WS 16 S 5,5x60	60	5.5	-	-	100	416945
S-WS 16 S 5,5x75	75	5.5	-	-	100	416946
S-WS 16 S 5,5x100	100	5.5	-	-	100	416947

S-WS 22 C

Application:**Wood boards to wood substructure****Fastening wood support for outside wood decks****Technical data:**

Screw design	Stitch point - Coarse thread - Hex head
Screw drive / recess type, D=8	Hexagon 10
Screw drive / recess type, D=10	Hexagon 13
Material	Carbon steel
Coating	Duplex-Coated
Penetration depth	Min. 20mm
Recommended rotation speed	2000 - 3000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	 1-10km

Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 22 C 8x60	60	8.0	-	≥ 16.9	100	387429
S-WS 22 C 10x60	60	10.0	-	≥ 16.9	50	387236
S-WS 22 C 10x75	75	10.0	-	≥ 16.9	50	387597
S-WS 22 C 10x100	100	10.0	-	≥ 16.9	50	387599
S-WS 22 C 10x120	120	10.0	-	≥ 16.9	50	387639
S-WS 22 C 10x140	140	10.0	-	≥ 16.9	50	387709

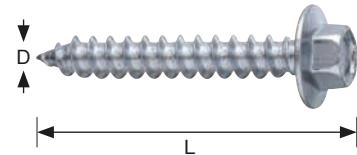
S-WS 55 Z

Application:
Wood boards to wood substructure



Technical data:

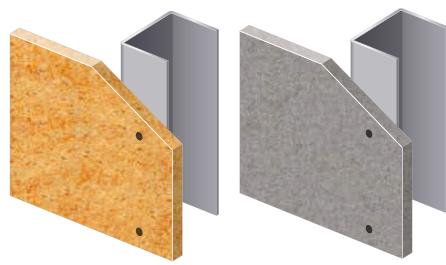
Screw design	Stitch point - Coarse thread - Hex head
Screw drive / recess type	Hexagon 8
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 20mm
Recommended rotation speed	500 - 1000 rpm
Pull-out load	$\geq 450 \text{ N}$
Standard	EN 14566
Environmental conditions	



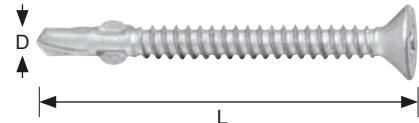
Single screws

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WS 55 Z 6x40	40	6.0	-	≥ 10.4	100	400749
S-WS 55 Z 6x50	50	6.0	-	≥ 10.4	100	400750
S-WS 55 Z 6x60	60	6.0	-	≥ 10.4	100	400751
S-WS 55 Z 6x75	75	6.0	-	≥ 10.4	100	400752
S-WS 55 Z 6x100	100	6.0	-	≥ 10.4	100	400753

S-WD 11 Z

Application:**Wood boards to metal substructure ≤ 2.25 mm****Cement boards to metal substructure ≤ 2.25 mm****Technical data:**

Screw design	Drill point - Wings - Fine thread - Countersunk head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Zinc plated
Penetration depth	Min. 15mm
Recommended rotation speed	1800 - 2500 rpm
Pull-out load	≥ 300 N
Standard	EN 14566
Environmental conditions	

**Single screws ***

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WD 11 Z 3,8x30	30	3.8	0.63 - 2.25	≥ 2.8	1000	413325
S-WD 11 Z 3,8x41	41	3.8	0.63 - 2.25	≥ 2.8	500	413326
S-WD 11 Z 3,8x57	57	3.8	0.63 - 2.25	≥ 2.8	500	413804

Collated screws for SMD 57 *

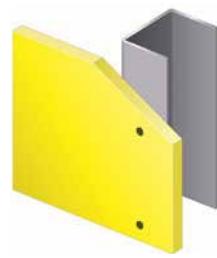
Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-WD 11 Z 3,8x30 M	30	3.8	0.63 - 2.25	≥ 2.8	1000	413805
S-WD 11 Z 3,8x41 M	41	3.8	0.63 - 2.25	≥ 2.8	1000	413806

* no CE

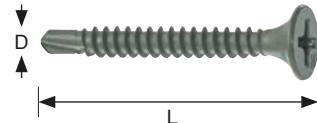
Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-WD 11 Z 3,9x32 M1	32	3.9	0.63 - 2.25	≥ 3.8	1000	■	■	2135879
S-WD 11 Z 3,9x41 M1	41	3.9	0.63 - 2.25	≥ 3.8	1000	■	■	2135950

S-DD 01 CRC

Application:
Exterior sheathing boards to metal substructure $\geq 0.75 \text{ mm} \leq 2.25 \text{ mm}$

Technical data:

Screw design	Drill point - Fine thread - Bugle head
Screw drive / recess type	PH2
Material	Carbon steel
Coating	Electro-Coating
Approval	EN 14566
Environmental conditions	


Collated screws for SMD 57

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	Item no.
S-DD 01 CRC 3,5x25 M	25	3.5	0.75 - 2.25	≥ 2.8	1000	2273320
S-DD 01 CRC 3,5x38 M	38	3.5	0.75 - 2.25	≥ 2.8	1000	2273258
S-DD 01 CRC 3,5x46 M	46	3.5	0.75 - 2.25	≥ 2.8	1000	2273259

Collated screws for SD-M 1 and SD-M 2

Description	Length L [mm]	Diameter D [mm]	Drilling capacity (DC)	Min. failure torque [Nm]	Pkg. quantity	SD-M 1	SD-M 2	Item no.
S-DD01 CRC 3,5x25 M1	25	3.5	0.75-2.25	≥ 2.8	1000	■	■	2296797
S-DD01 CRC 3,5x38 M1	38	3.5	0.75-2.25	≥ 2.8	1000	■	■	2296798
S-DD01 CRC 3,5x46 M1	46	3.5	0.75-2.25	≥ 2.8	1000	■	■	2296799

5. OVERVIEW OF TOOLS AND ACCESSORIES

Cordless drywall screwdriver SD 5000-A22



Ordering description	Content	Sales quantity	Item number
Cordless drywall screwdriver SD 5000-A22 toolbox	1 x SD 5000-A22 1 x Bit S-B PH2 26/1" IF 1 x Bit holder S-BH M 50/2" 1 x Hilti toolbox	1 pc	2229876
Cordless drywall screwdriver SD 5000-A22 cardboard box	1 x SD 5000-A22 1 x Bit S-B PH2 26/1" IF 1 x Bit holder S-BH M 50/2"	1 pc	2229875
Cordless drywall screwdriver SD 5000-22 (Nuron) toolbox	1 x SD 5000-22 1 x Bit S-B PH2 25/1" IF 1 x Bit holder S-BH M 50/2" 1 x Hilti toolbox	1 pc	2248354
Cordless drywall screwdriver SD 5000-22 (Nuron) cardboard box	1 x SD 5000-22 1 x Bit S-B PH2 25/1" IF 1 x Bit holder S-BH M 50/2"	1 pc	2248355

Corded drywall screwdriver SD 5000 230V



Ordering description	Content	Sales quantity	Item number
Corded drywall screwdriver SD 5000 230V toolbox	1 x SD 5000 230V 1 x Bit S-B PH2 26/1" IF 1 x Bit holder S-BH M 50/2" 1 x Hilti toolbox	1 pc	2030406
Corded drywall screwdriver SD 5000 230V cardboard box	1 x SD 5000 230V 1 x Bit S-B PH2 26/1" IF 1 x Bit holder S-BH M 50/2"	1 pc	2020310

**Corded drywall screwdriver
SD 6000 230V**



Ordering description	Content	Sales quantity	Item number
Corded drywall screwdriver SD 6000 230V toolbox	1 x SD 6000 230V 1 x Bit S-B PH2 26/1" IF 1 x Bit holder S-BH M 50/2" 1 x Hilti toolbox	1 pc	2030407
Corded drywall screwdriver SD 6000 230V cardboard box	1 x SD 6000 230V 1 x Bit S-B PH2 26/1" IF 1 x Bit holder S-BH M 50/2"	1 pc	2020266

**Corded wood/drywall screwdriver
SD 2500 230V**



Ordering description	Content	Sales quantity	Item number
Corded wood/drywall screwdriver SD 2500 230V toolbox	1 x SD 2500 230V 1 x Bit S-B PH2 26/1" IF 1 x Bit holder S-BH M 75/3" 1 x Hilti toolbox	1 pc	203610
Corded wood/drywall screwdriver SD 2500 230V cardboard box	1 x SD 2500 230V 1 x Bit S-B PH2 26/1" IF 1 x Bit holder S-BH M 75/3"	1 pc	236597

OVERVIEW OF TOOLS AND ACCESSORIES

Screw magazine SD-M 1



Ordering description	Content	Sales quantity	Item number
Screw magazine SD-M 1	1 x SD-M 1 1 x Bit S-SY PH2 81/3 1/4"	1 pc	2208484

Screw magazine SD-M 2



Ordering description	Content	Sales quantity	Item number
Screw magazine SD-M 2	1 x SD-M 2 1 x Bit S-SY PH2 102/4"	1 pc	2208485

Screw magazine SMD 57



Ordering description	Content	Sales quantity	Item number
Screw magazine SMD 57	1 x SMD 57 1 x Bit S-SY PH2 116/4 1/2"	1 pc	2289475

SMD 57 Nose Piece

Ordering description	Content	Sales quantity	Item number
SMD 57 NP	1 x SMD 57 NP	1 pc	2289476

SMD 57 Feeding Mechanism

Ordering description	Content	Sales quantity	Item number
SMD 57 FM	1 x SMD 57 FM	1 pc	2289476

SMD 57 Spring

Ordering description	Content	Sales quantity	Item number
SMD 57 Spring	1 x SMD 57 Spring	1 pc	387674

SMD 57 Flooring Attachment

Ordering description	Content	Sales quantity	Item number
SMD 57 FA	1 x SMD 57 FA	1 pc	2347135

Extension tube SME

Ordering description	Content	Sales quantity	Item number
Extension tube SME	1 x Extension tube 1 x Bit holder S-BH 570 SME 1 x Side handle	1 pc	304495
Spare bit holder S-BH 570 SME		1 pc	304741

Bit holders

Ordering description	Sales quantity	Item number
Magnetic bit holder S-BH M 50/2"	1 pc	2038758
Magnetic bit holder S-BH M 75/3"	1 pc	2038759

Single bits

Ordering description	Sales quantity	Item number
Driver bit S-B PH2 25/1" IF (10)	10	2039035
Driver bit S-B PH2 25/1" IF (100)	100	2039036
Driver bit S-B PH2 25/1" IF (250)	250	2039037

Collated bits SD-M1

Material description	Sales quantity	Item number
Driver bit S-SY PH2 81/3 1/4" (5)	5	2039290
Driver bit S-SY PH2 81/3 1/4" (10)	10	2039291

Collated bits SD-M2

Material description	Sales quantity	Item number
Driver bit S-SY PH2 102/4" (5)	5	2131008
Driver bit S-SY PH2 102/4" (10)	10	2131009

Collated bits SMD 57

Material description	Sales quantity	Item number
Driver bit S-SY PH2 116/4 1/2" (5)	5	2039151
Driver bit S-SY PH2 116/4 1/2" (10)	10	2039152



Interior finishing screws



Hilti Corporation
9494 Schaan, Liechtenstein
P +423-234 2965

www.facebook.com/hiltigroup
www.hilti.group